


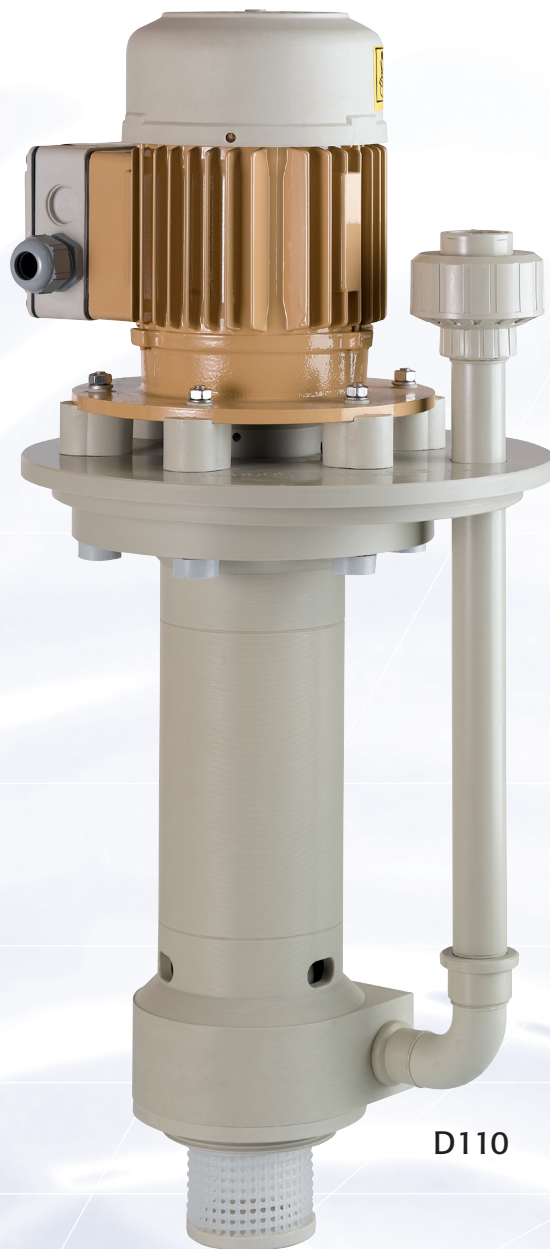

D110

540 - 2,700 us-gph

Typical applications


Plating - Rinsing - Filtration
Waste treatment

Features


- Immersion length 12"
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP and CPVC

Options

- Suction extension pipe
- Hose connection

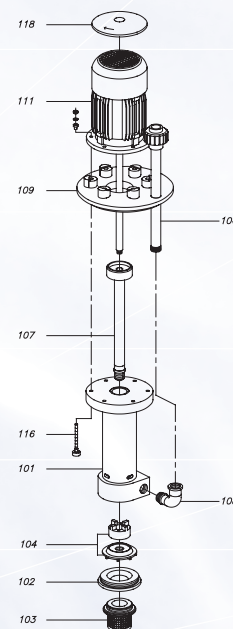

Vertical pumps series D110 - PP

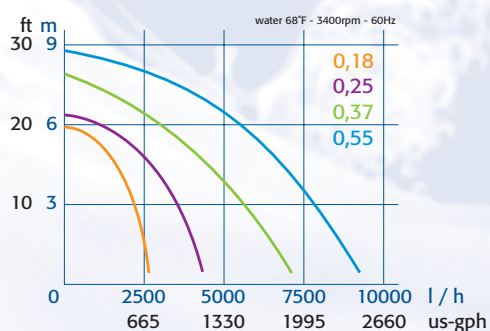

Type

D110-018-300-PP
D110-025-300-PP
D110-037-300-PP
D110-055-300-PP

HP

1/4
1/3
1/2
3/4

**Out
pipe size**

3/4"
3/4"
3/4"
1"



www.hendor.com

Hendor-PE, Inc.
55 Concourse Way Greer, SC 29650
Phone 864-879-0888 Fax 864-879-4237
usa@hendor.com

