


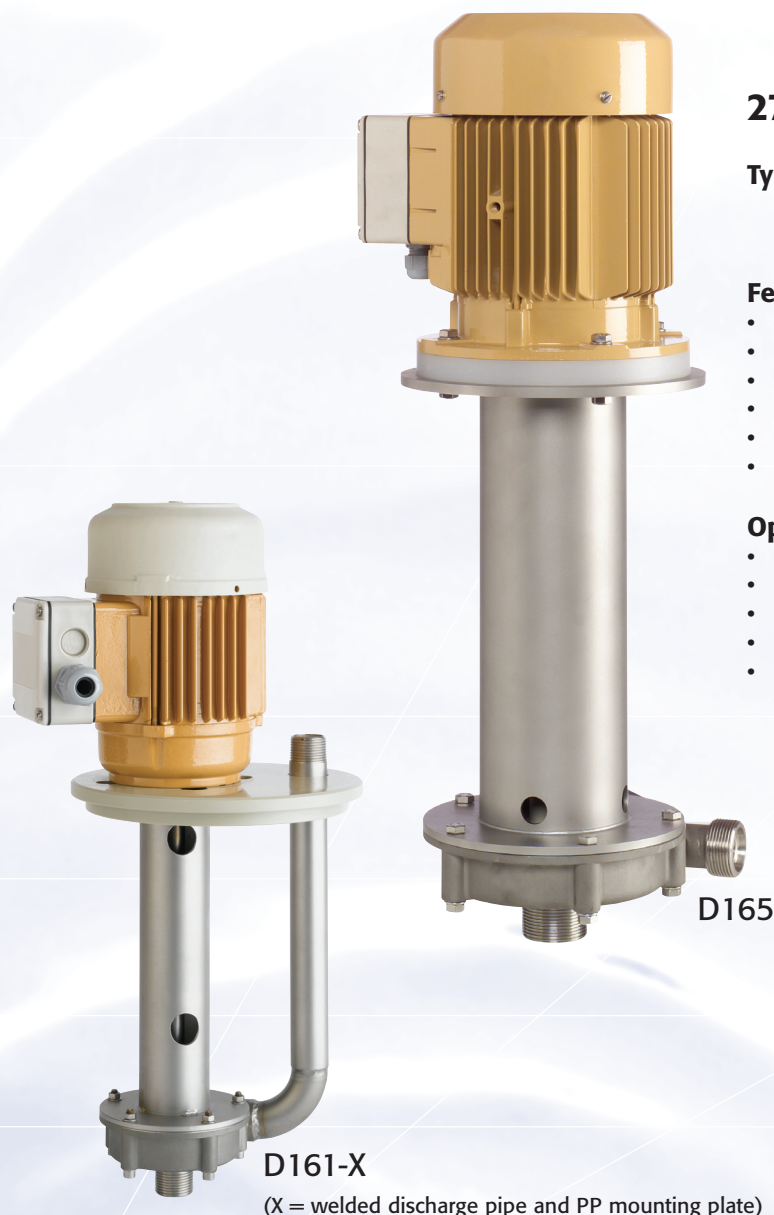

270 - 10,000 us-gph

Typical applications


Alkaline cleaners
Electroless nickel

Features

- No bearings
- Sealless
- Can run dry
- Self priming
- Integral drive shaft
- Fume protection

Options

- Suction extension pipe
- Customised mounting plate
- Customised immersion length
- Out of tank version
- MPT threaded discharge pipe (X version)

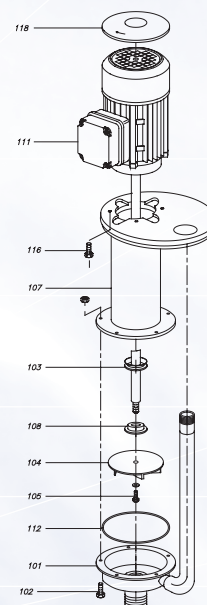


D161-X


(X = welded discharge pipe and PP mounting plate)

D165

Vertical pumps series D160 - SS316

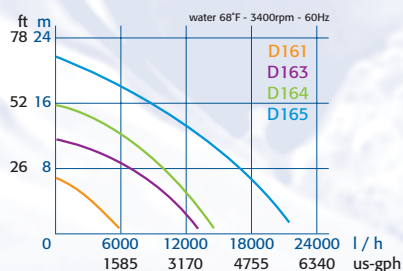

Type	HP	Immersion length	In BSP	Out BSP	Out # X BSP
D161-(X)	1/2	10-1/2"	3/4"	3/4"	3/4"
D163-(X)	1	15"	1"	1"	1"
D164-(X)	1-1/2	15"	1-1/4"	1"	1-1/4"
D165-(X)	2	15-1/2"	1-1/2"	1-1/4"	1-1/2"

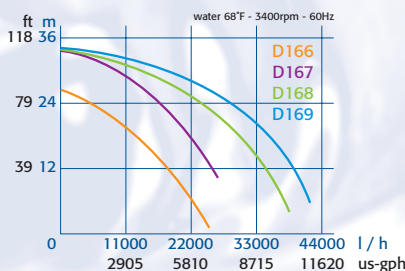

Type	HP	Immersion length	In BSP	Out BSP	Out # X BSP
D166-(X)	3	15-1/2"	1-1/2"	1-1/4"	1-1/2"
D167-(X)	4	15-3/4"	2"	1-1/2"	1-1/2"
D168-(X)	5-1/2	15-3/4"	2"	1-1/2"	2"
D169-(X)	7	15-3/4"	2"	1-1/2"	2"



www.hendor.com

Hendor-PE, Inc.
55 Concourse Way Greer, SC 29650
Phone 864-879-0888 Fax 864-879-4237
usa@hendor.com

