

Control unit with graphic 5.7" display

For manual or auto control (Bus control) of PULSE-REVERSE POWER SUPPLIES of the series pe80CD... /86C... /861...



Control unit pe8005, front view

Characteristic values

Designed for the use in plating environment

Large illuminated 5.7" graphic display

5 x 4 keypad for easy handling and navigation

Clear and user friendly menu navigation via well structured pull down menus

Easy generation of complex waveforms, consisting of up to 16 steps (2 current values per step)

Ability to control up to 16 Pulse Reverse Power Supplies (8 x dual)

Synchronization of pulse outputs can be configured

All parameters are adjustable during running process

MMC/SD card reader for software update, import / export of device configuration, set points and bus-logging data

Ah-totalizer, dosage counter, timer

Start and stop ramps (in automatic mode only)

Batch function (in automatic mode only)

RS485 interface to control the unit via specified pe protocol

2 programmable output relays

Ambient temperature max. 40°C

Protection grade IP54

Polycarbonate (ABS) casing, polycarbonate-coated aluminium front panel

Menu languages: English, German

Weight: 3200g

Dimensions (W x H x D): 325 x 240 x 90mm

Mains supply: 115V, 230V AC or 24V DC

Display

Clear listing of the actual values of all pulse outputs

Scope function for set points and actual values

Display of status, warning and error messages

Temperature indication

Optional available functions

PROFIBUS interface


TCP/IP interface:

- to control
- Integrated web server (status, set points, actual values)
- remote control via website (Java required)


EMV: EN50011 class A, group B ; EN61000-6-4 and EN61000-6-2;
CE-conformity low voltage guide line: EN50178

Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.


Examples of the display:

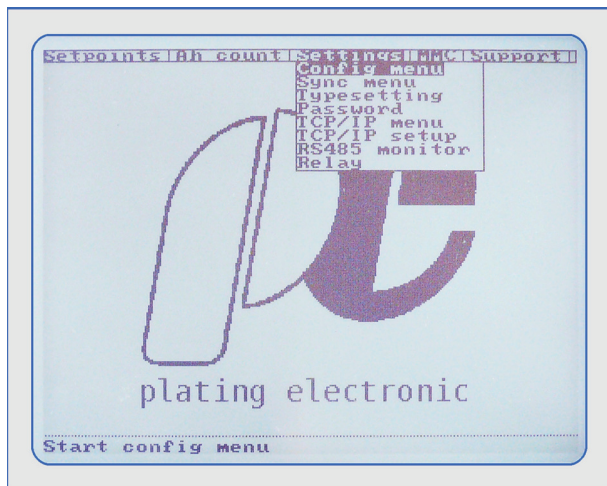

Pull down menu "Settings"

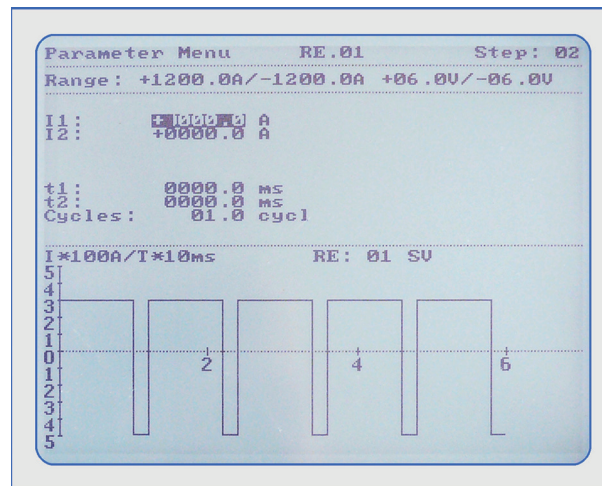

Set point programming with graphic diagram for easy handling

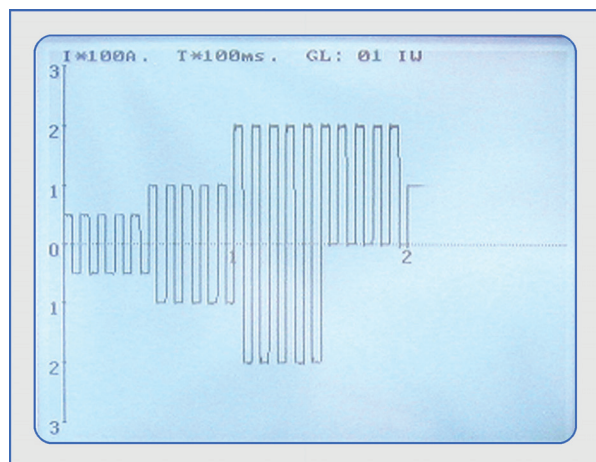

Actual output value (scope function)

pe	10_054,	10_070/20288	07:36.10	13.12.2011
RE:	U/V Ave.	I/A Ave.	Ah h/m/s	U E
01	+000.0	+0000.0	00002:37:06	13.12.2011
02	+000.0	+0000.0	00000:10:07	13.12.2011
03	+000.0	+0000.0	00000:00:00	13.12.2011
04	+000.0	+0000.0	00000:00:00	13.12.2011
05	+000.0	+0000.0	00000:00:00	13.12.2011
06	+000.0	+0000.0	00000:00:00	13.12.2011
Dosing totalizer 1:			00002:47:13	
Dosing totalizer 2:			00002:47:13	
Dosing totalizer 3:			00002:47:13	
Dosing totalizer 4:			00002:47:13	

The actual parameters of all PULSE-REVERSE Power Supplies are listed in the operating screen

With the optional available ETHERNET interface it is possible to control the control unit by a Java applet. The integrated web server provides the actual status, the set points and the actual values for all PULSE-REVERSE Power Supplies. This function has been especially designed for remote service and remote diagnostics.

The two free programmable relays can be used for warning, status and error messages and also for dosage impulse.

Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.