



D18-36-400-PP

12.000 - 43.000 l/h

Typical applications


Plating - Rinsing - Filtration
Waste water treatment - Scrubbers

Features


- Immersion length 400mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal or bearing
- Self priming - can run dry
- Wide range of motor currency
- Full length stainless steel motor shaft
- Outlet sockets available in PP, PVDF and CPVC
- GF union connection
- All fasteners stainless steel
- 120µm chemical resistant coating

Options

- Suction extension pipe
- Hose connection
- Customized mounting plate
- Out of Tank model
- FIP thread connection
- Impeller blocking
- Fume lock
- High Pressure model (HD)

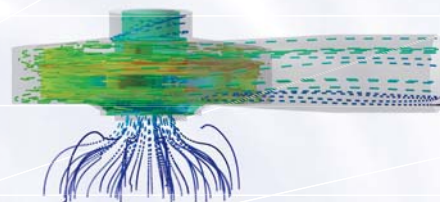


Vertical pumps series D18 - PP/PVDF

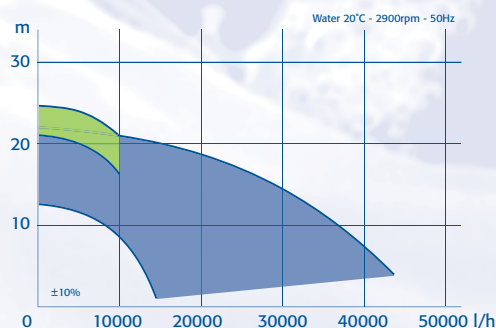


Type	Material	Motor (kW)	INom* (A)	Out (d/DN)
D18-14-400	PP/PVDF	0,55	1,5	25/20
D18-18-400		0,75	1,65	32/25
D18-23-400		1,1	2,45	40/32
D18-30-400		1,5	3,2	40/32
D18-36-400		2,2	4,5	40/32
D18-43-400		3	5,75	50/40
D18-05-HD-400				25/20
D18-10-HD-400				25/20

*400V-3ph-50Hz

i www.hendor.com



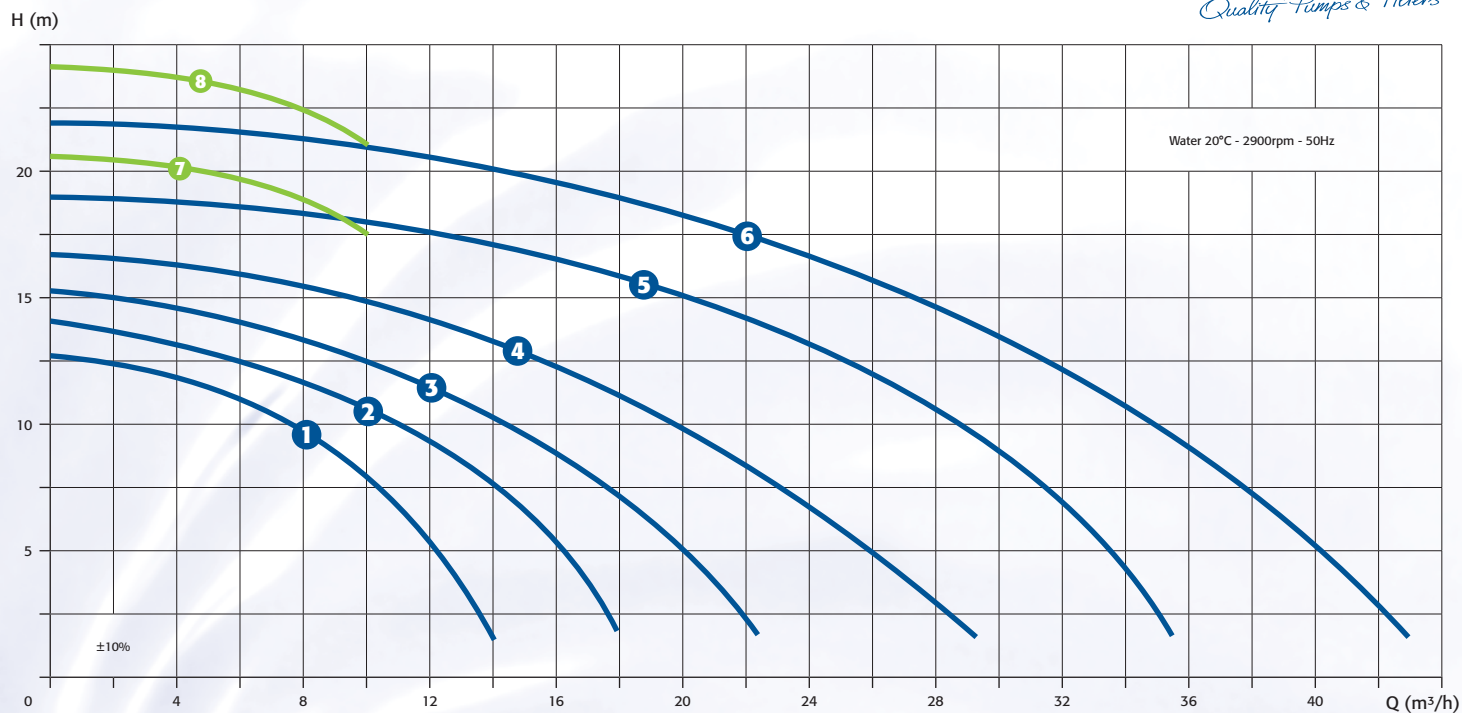

D18-18-400-PVDF

