

D20-40/20-400-PP

## 100 - 220 gpm

### Typical applications

- Plating
- Rinsing
- Filtration
- Waste treatment
- Scrubbing


### Features

- Available in PP or NPP
- Motor range 4 - 10 HP
- Immersion length 16"
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

### Options

- Suction extension pipe
- Out-of-Tank model
- Vapour lock
- Strainer

## Vertical pumps series D20

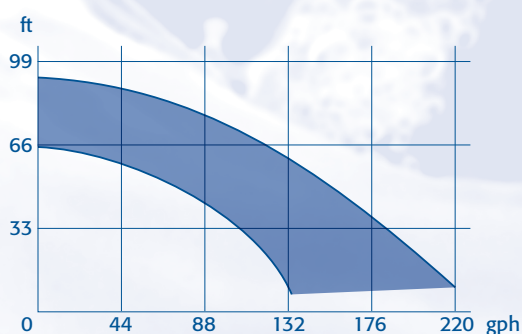

### Type

D20-40/20-400-PP  
D20-45/25-400-PP  
D20-50/28-400-PP

### Out pipe size

1 1/2"

**i** [www.hendor.com](http://www.hendor.com)

