



D24-65/37-400-PP

180 - 450 gpm

Typical applications

- Plating
- Rinsing
- Filtration
- Waste treatment
- Scrubbing


Features

- Available in PP or NPP
- Motor range 4 - 20 HP
- Immersion length 16"
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Outlet sockets available in PP, PVDF and CPVC

Options

- Suction extension pipe
- Out-of-Tank model
- Vapour lock
- Strainer

Vertical pumps series D24

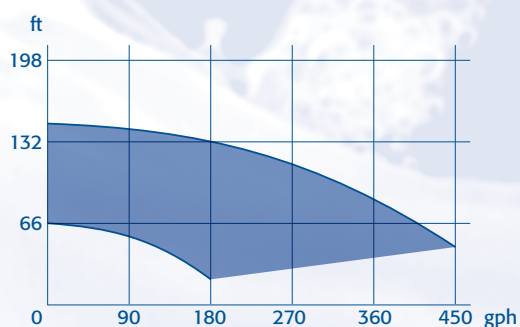

Type

Out pipe size

D24-50/27-400-PP	
D24-55/35-400-PP	2"
D24-60/42-400-PP	
D24-60/29-400-PP	
D24-65/37-400-PP	2 1/2"
D24-70/42-400-PP	
D24-80/34-400-PP	
D24-90/38-400-PP	2 1/2"
D24-100/42-400-PP	

i www.hendor.com

